PRODUCT CATALOG

(Y) ILMAX SINGAPORE

CARS LUBRICANT RANGE


AUTHORISED SINGAPORE DISTRIBUTOR



The First in Synthetics ®





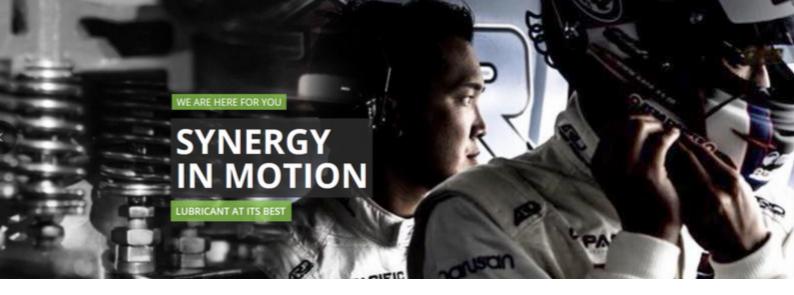

WELCOME TO OILMAX

Oilmax Singapore Pte Ltd was set up in Singapore in 2014 as the regional office to provide comprehensive and timely support to our customers in the region. As a trusted leading lubricant supplier, we strive to provide automotive and business owners a one stop lubricant solution for all their needs.

Many of these lubricants are specially formulated and selected for the Asia Pacific market requirements. Our technical team recommends the appropriate lubricant based on the Original Equipment Manual and specifications in all areas such as private use, servicing workshops, commercial vehicle fleets or the complex industrial use.

Discover how using the right lubricant can bring you substantial savings by maximizing equipment efficiency, prolong vehicle life and reduce downtime.

In Oilmax, this is our mission : to actively create a sustainable synergy with our customers , Synergy in Motion – Lubricant at its Best

BRANDS WE CARRY



The First in Synthetics ullet













Quality and technology assurance

We recommend according to specification

Always ready to help our customers



AMSOIL SIGNATURE SERIES

1 QUART

ADVANTAGES AND POTENTIAL BENEFITS

• Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. Guaranteed protection for up to 25,000 miles (40,200 km) or 1 year, whichever comes first.

0W20

0W30

5W30

0W40

5W50



0W-20 (ASM)

- API SN PLUS (Resource Conserving)
- ILSAC GF-5
- GM dexos1® Gen2 *(supersedes 6094M)
- ACEA A1/B1
- Chrysler MS-6395
- Ford WSS-M2C947-A

0W-30 (AZO)

- API SN PLUS (Resource Conserving)
- ILSAC GF-5
- GM dexos1® Gen2 *(supersedes LL A025,6094M,4718M)
- ACEA A5/B5, A1/B1
- Chrysler MS-6395

5W-30 (ASL)

- API SN PLUS (Resource Conserving)
- ILSAC GF-5
- GM dexos1® Gen2 *(supersedes LL-A025,6094M,4718M)
- ACEA A5/B5, A1/B1
- Chrysler MS-6395
- Honda HTO-06
- Ford WSS-M2C946-A, WSS-M2C929-A

0W-40 (AZF)

- API SN PLUS
- Chrysler MS-12633, MS-10725, MS-10850
- Nissan GT-R®

5W-50 (AMR)

- API SN PLUS
- Ford WSSM2C931-C (Mustang)



AMSOIL OE SYNTHETIC SERIES

1 QUART

ADVANTAGES AND POTENTIAL BENEFITS

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. Provides 47% more wear protection. Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

0W16 0V

0W20

5W30

5W40



0W-16 (OES)

API SN PLUS (Resource Conserving)

0W-20 (OEZ)

- API SN PLUS (Resource Conserving)
- ILSAC GF-5
- GM dexos1® Gen 2(supersedes 6094M)
- ACEA A1/B1
- Chrysler MS-6395
- Ford WSS-M2C947-A

5W-30 (OEF)

- API SN PLUS (Resource Conserving)
- ILSAC GF-5
- GM dexos1® Gen 2(supersedes LL-A025, 6094M, 4718M)
- ACEA A5/B5, A1/B1
- Chrysler MS-6395
- Honda HTO-06
- Ford WSS-M2C946-A, WSS-M2C929-A

5W-40 (OEB)

- API SN PLUS, SM.
- ACEA A3/B3



EUROPEAN CAR FORMULA SYNTHETIC

1 QUART

ADVANTAGES AND POTENTIAL BENEFITS

AMSOIL European Car Formula features precisely balanced formulations that consider the needs of modern exhaust treatment devices. It is important to use an oil that meets the proper specification to ensure optimum protection and performance.

0W40

5W40 CLASSIC EMISSIONS SYSTEM PROTECTION

0W-40 (EFO)

- ACEA A3/B3, A3/B4
- API SN/SM
- BMW LL-01
- MB 229.3/229.5
- Porsche A40
- Renault 0710, 0700

Audi/Volkswagen 502.00/505.00

5W-40 (EFM)

- MB-Approval 229.5, Porsche A40
- VW/ Audi 502.00/505.00
- ACEA A3/B3, A3/B4
- API SN/SM
- BMW LL-01, Renault 0710, 0700

5W30

5W40 IMPROVED EMISSIONS SYSTEM PROTECTION

5W-30 (AEL)

- VW 504.00/507.00
- **API SN**
- ACEA C3
- GM dexos2™
- Chrysler MS-11106, MB 229.51, BMW LL-04, Porsche C30

5W-40 (AFL)

- BMW Longlife-04
- MB-Approval 229.51
- Porsche A40
- ACEA C3
- API SN/SM/CF
- Chrysler MS-10850 (supersedes MS-10896)
- Ford WSS-M2C917-A
- GM dexos2™ (supersedes LL-A-025 and LL-B-025)
- Renault RN0700/ RN0710 , Audi/Volkswagen 502.00/505.01





AMSOIL XL SYNTHETIC SERIES

1 QUART

ADVANTAGES AND POTENTIAL BENEFITS

For enthusiasts who want to do something extra for their vehicle. Engineered for advanced automotive technology, including turbos and direct injection. Boosted formulation delivers more cleaning power and promotes longer engine life. Provides 64% more protection against oil breakdown than required by the GM dexos1® Gen 2 specification. Extra protection that lasts up to 12,000 miles (19,300 km) or 1 year, whichever comes first.

0W20

5W30

0W-20 (XLZ)

- API SN PLUS (Resource Conserving)
- ILSAC GF-5
- GM dexos1® Gen 2 * (supersedes 6094M)
- ACEA A1/B1
- Chrysler MS-6395
- Ford WSS-M2C947-A



5W-30 (XLF)

- API SN PLUS (Resource Conserving)
- ILSAC GF-5
- GM dexos1® Gen 2 *(supersedes LL-A025, 6094M, 4718M)
- ACEA A5/B5, A1/B1
- Chrysler MS-6395
- Honda HTO-06
- Ford WSS-M2C946-A, WSS-M2C929-A

DOMINATOR® SYNTHETIC RACING OIL

1 QUART

ADVANTAGES AND POTENTIAL BENEFITS

Superior performance and maximum protection in high-performance and racing applications.

10W30

15W50





PREMIUM PROTECTION SYNTHETIC

1 QUART

ADVANTAGES AND POTENTIAL BENEFITS

Ideal for gasoline engines and diesel applications not equipped with diesel particulate filters (DPFs), where the extra protection of a high-zinc and TBN formula is desired.

10W40

10W-40 (AMO)

- API CI-4+/SL
- ISO-L-EMA
- Caterpillar ECF-1
- JASO MA (Motorcycle)
- MAN 271/3275, MTU Type 2
- Cummins 20071/20072/20076/20077
- Volvo VDS-2, VDS
- Mack EO-M+
- ACEA A3/ B3/ E3/ E5
- MB 228.1, 228.3, 229.1, Detroit Diesel 93K214



SEVERE GEAR® SYNTHETIC EP GEAR LUBE

1 QUART

ADVANTAGES AND POTENTIAL BENEFITS

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Delivers 20% more cold-temperature protection than required by ASTM D2983.

75W-90 \ 75W-140

75W-90 (SVG)

- Top fuel efficiency and cold-temperature performance
- Use in differentials that require API GL-5/MT-1 MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

75W-140 (SVO)

- Maximum viscosity protection for severe-duty applications
- Use in differentials that require API GL-5/MT-1 MIL-PRF-2105E • MACK GO-J • Dana SHAES 234
- (Eaton PS-037)





SIGNATURE SERIES SYNTHETIC

1 QUART

AUTOMATIC TRANSMISSION FLUID

ADVANTAGES AND POTENTIAL BENEFITS

Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants

Multi-Vehicle (ATF)

Use in applications that require Allison C-4, TES-389 · BMW 7045E, 8072B, LA 2634, LT 71141 · Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA · Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 · GM DEXRON II, DEXRON III, AutoTrak II · Honda/Acura ATF-Z1 · Hyundai/Kia SP-II, SP-III, Red-1 · IDEMITSU K17 · JASO 1A · JWS 3309, 3314, 3317 · MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F · Mazda ATF-M III, ATF-MV, F-1 · Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 · Mitsubishi SP-II, SP-III, ATF-J2 · Nissan Matic-D, Matic-J, Matic-K, 402 · Saab 3309 · Shell 3403, LA 2634 · Subaru ATF, ATF-HP · Suzuki 3314, 3317 · Texaco ETL-7045E, ETL-8072B, N402 · Toyota Type T, T-II, T-III, T-IV · Voith 55.6335, 55.6336 · Volvo 97340, 97341 · VW/Audi G 052 162, G 052 990, G 055 025 · ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 16M, 17C, 20B, 20C, 21L



Use in applications that require Aisin-Warner AW-1 · BMW 83 22 0 142 516, 83 22 2 152 426 · Chrysler Mopar 68157995A, SP-IV · DSIH 6p805 · Ford MERCON LV, SP · GM DEXRON HP, DEXRON VI · Honda/Acura DW-1, Type 3.0 · Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M · JASO 1A-LV · JWS 3324 · Mercedes Benz 236.12, 236.14, 236.15, 236.41 · Mitsubishi SP-IV, ATF J3, ATF-PA · Nissan Matic-S, Matic-W · Saab 93 165 147 · Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 · Toyota WS · Volvo 31256774 · VW/Audi G 055 005, G 055 162, G 060 162 · ZF S671 090 255







SYNTHETIC CVT FLUID

ADVANTAGES AND POTENTIAL BENEFITS

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

(CVT)

• Use in belt- and chain-type CVTs that require BMW EZL 799A (8322 0 136 376 /8322 0 429 154) · Daihatsu Amix CVTF-DC, CVTF-DFE · FCA Mopar CVTF +4 (Mopar CVT 4) · Ford M2C928-A (CFT 23), WSS-M2C933-A (CFT 30, Motorcraft XT-7-QCFT), MERCON C · GM DEX-CVT, GM CVT (CVTF I-Green2) · Honda HMMF (08200-9006), HCF-2 · Hyundai/Kia SP-CVT 1 · Mazda CVTF 3320 · Mercedes Benz 236.20 (001 989 46 03) · Mitsubishi CVTF-J1, CVTF-J4 · Nissan NS-1, NS-2, NS-3 · Subaru e-CVT, i-CVT F, Lineartronic CV-30, Lineartronic CVTF/CVT-II (K0425Y0710), High Torque CVTF · Suzuki CVT Fluid Green 1, CVT Fluid Green 2 (NS-2), CVTF 3320 (TC) · Toyota/Lexus TC, FE · VW/Audi TL 52180 (G 052 180), TL 52516 (G 052 516)

1 QUART



100% SYNTHETIC DCT FLUID

ADVANTAGES AND POTENTIAL BENEFITS

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

(DCT)

Use in applications that require BMW 83 22 2 148 578, 83 22 2 148 579, 83 22 0 440 214, 83 22 2 147 477, DCTF-1, MTF-LT-5 • Chrysler 68044345 • Citroen/Peugeot 9734.S2 • Ferrari/Shell TF DCTF-3 • Fiat BOT 341 • Ford WSS-M2C-936-A • Mercedes Benz 236.21, 236.25 • Mitsubishi Dia-Queen SSTF-I • Nissan GT-R Transmission Oil R35 Special • Pentosin FFL-2, FFL-3, FFL-4 • Porsche 999.917.080.00, 043 207 29, 043 207 30, 000 430 20 • Renault BOT 450 • Volvo 1161838, 1161839 • VW/Audi G 052 182, G 052 529, TL 521 82

1 QUART





CAR CARE RANGE



Power Foam® (APF)

 Improves starting and performance by cleaning dirty intake systems and spark plugs, freeing sticky valves and removing gum, varnish and carbon deposits



- Industry's Most Advanced Formulation
 Improves Fuel Economy
- Provides improved fuel mileage up to 5.7% and reduces emissions in gasoline directinjected and port-fuel-injected engines





- High-performance gasoline additive formulated with potent synthetic
- detergent additives. Provides excellent deposit clean-up and keepclean performance in both direct-injected and port-injected engines.



Diesel Injector Clean (ADF)

- Targets traditional nozzle deposits, combustion chamber deposits and
- internal diesel injector deposits found in HPCR injectors. Lubricates
- to reduce fuel pump and injector wear.
 Concentrated for rapid results,
- maximum horsepower and up to 8 percent increased fuel economy in
- engines with accumulated deposits.





CAR CARE RANGE



Engine and Transmission Flush (FLSH)

 Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.



 High-performance brake fluid specially designed as a multiuse product for passenger-car, light-truck and powersports applications. Use in equipment that requires a DOT 3, 4 or 5.1 brake fluid





Multi-Vehicle Synthetic Power Steering Fluid (PSF)

- Provides excellent wear protection, long component life and
- quiet operation in most passenger cars and light trucks.

DOMINATOR® Coolant Boost (RDCB)

- Helps reduce engine temperatures, increase horsepower, promote
- faster engine warm-up times and reduce radiator and engine corrosion
- in racing and passenger vehicles.





CAR CARE RANGE



Miracle Wash® Waterless Wash & Wax (AMW)

 Unique dry car wash and polish delivers outstanding performance and quick, easy and economical application. No water required.

Glass Cleaner (AGC)

 Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.



Engine Degreaser (AED)

 Effectively cleans engine surfaces by cutting through grease, oil and grime.





GULF ARROW GT

10W50

5W40

0W30

0W20

1L & 4L







ADVANTAGES AND POTENTIAL BENEFITS

- Finest Gulf engine oil range using cutting edge technology
- High performance 100% Made in Japan metal tin series
- Full PAO & Ester for excellent base oil and lubricity
- Perfect engine protective even at high temperature due to shear stability proven in
- Minimize oil consumption with blending of organic molybdenum as friction modifier
- Outstanding viscosity index > 200
- Boosting of antioxidant for long oil life

OEM BUILDER APPROVALS & SPECIFICATION

- **API SN**
- ACEA A3/B4



GULF FORMULA G

5W40

4 L



ADVANTAGES AND POTENTIAL BENEFITS

- Supreme Addictive
- PowerMax Molecules
- Fuel Economy
- 19% Better sludge rating
- 39.5% Better wear protection
- 10% Better rating in ring sticking
- Combination above gives you sustained power for longer

OEM BUILDER APPROVALS & SPECIFICATION

- API SN
- ACEA A3/B4
- Porsche oil category A40
- MB Approval 229.3
- VW 502 00 and 505 00

GULF ULTRASYNTH X

5W30

0W20

4 I



ADVANTAGES AND POTENTIAL BENEFITS

- Engine Detoxifiers
- Excellent soot control
- Extend engine life
- Up to 100% less viscosity increase
- Up to 100% lesser cam wear
- Consistent viscosity and lower wear gives you a smoother driving

OEM BUILDER APPROVALS & SPECIFICATION

- API SN (Resource Conserving)
- ILSAC GF-5



AUTOBACS ENGINE OIL

5W40 (

5W30

0W20

4 L |







ADVANTAGES AND POTENTIAL BENEFITS

- Autobacs engine oil has achieved the highest saving fuel economy standard in API standard.
- 100% Made in Japan
- Superior antiwear addictives
- Reduce maintenance cost and keep engine clean
- Effective rust and corrosion protection
- Experience a quieter ride

OEM BUILDER APPROVALS & SPECIFICATION

- API SN (Resource Conserving)
- ILSAC GF-5









For questions and concerns, call (65) 66834384 or email orders@oilmax.com.sg

Oilmax Singapore Pte Ltd

10 Buroh Street #06-25 Singapore 627564 www.oilmax.com.sg

facebook : oilmaxsgsg